




Fixture Type: _____
 Client: _____
 Project: _____
 Location: _____
 Catalog#: _____

DIMENSION

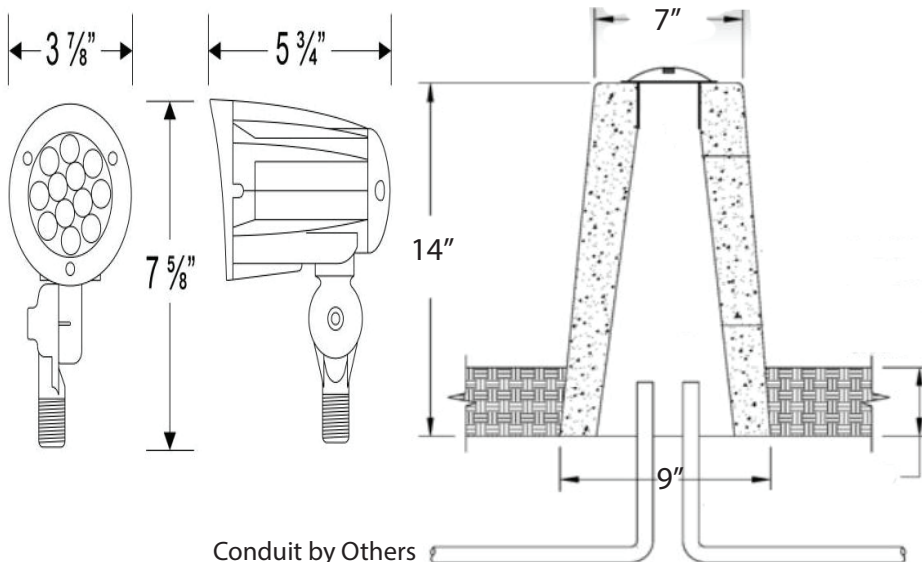

Cono 69

PRODUCT INFORMATION

Housing:

Concrete Bollard with aluminum housing and floodlight. Floodlight is aluminum housing powder coated bronze.

Mounting:

Bollard should be recessed into finish floor minimum of 2".

Wattage:

Array: 28W - 3000K (3,200 Lumens)

Driver:

Electronic Driver, 120V-277V, 50/60Hz

Listing & Rating:

CSA: Listed for wet locations
IP65



ORDERING INFORMATION

Ordering Example: 6911 - 28 - U - 3000K - P - BZ - N

Model	Wattage	Ballast	CCT	Lens	Fixture Color	Concrete Color
Cono 69 (6911)	28 - 28W	U - 120-277V	3K - 3000K	P - Polycarbonate	BZ - Bronze	N - Natural P - Pottery B - Black G - Dusty Green G - Golden Bluff AB - Amber Beige WB - Warm Beige W - White

Cono 69 - Round Concrete Pathway Bollard