



Fixture Type: _____
 Client: _____
 Project: _____
 Location: _____
 Catalog#: _____

FEATURES

USE OF PRODUCT

The intended use of this product is for parking lots, walkways, shopping centers, recreational areas, or any open outdoor commercial or industrial space.

HOUSING

Weather tight unit continuous heliarc welded at all seams, spun from 0.080" aluminum.

FIXTURE ARM

Fixed arm mounts

FINISH

Thermoset polyester oven-baked powdercoat, in any standard color. Made to order colors are available to your specification.

OPTICS

A one-piece hydro form or segmented reflector with specular aluminum finish.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours in 3000K, 3500K, 4000K, or 5000K with CRI>83. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

DRIVER

Durable LED driver operates at 120-277V with 0-10V dimming protocol. Power factor: 0.90; 50 to 60 Hz. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. -30°C Min Temp. 40°C Max Temp. Step down transformer may be utilized for 480V or 347V applications.

MOUNTING


Fixture pole must be mounted on a concrete base (supplied by others).

EPA

20"(Size A) Effective Projected Area (Sq. Ft.): 2.688 ft²

LISTINGS/COMPLIANCE

- CEC Complaint emergency driver
- CSA - Suitable for wet locations.
- Dark Sky Compliant

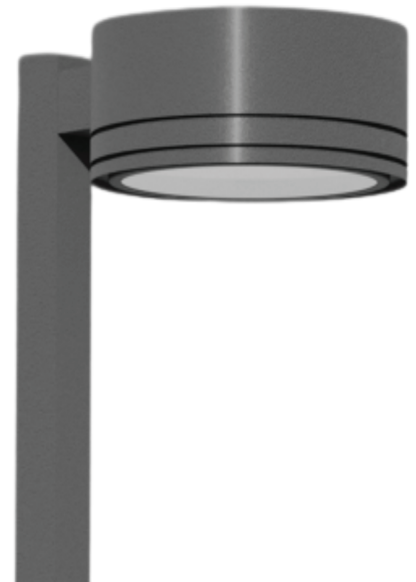

SERIES	DIAMETER	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE	DISTRIBUTION TYPES	MOUNTING	FINISH
T395LED	20 - 20"	30W - 30W/3330lm	35K - 3500K	UNV- 120V-277V	T5 - Type V	AM6S- 6" Arm Mount Square	BZ - Bronze
	24 - 24"	58W - 58W/6050lm	40K - 4000K			AM10S- 10" Arm Mount Square	MTO - Made to order
			50K - 5000K			AM6R- 6" Arm Mount Round	MGTO- Marine grade made to order
						AM10R- 10" Arm Mount Round	



Fixture Type: _____


Client: _____

Project: _____

Location: _____

Catalog#: _____

DIMENSIONS

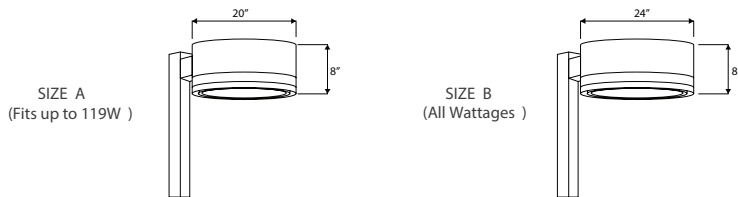

B.U.G. RATING

	T1 Optic	T2 Optic	T3 Optic	T4 Optic	T5 Optic
T395LED-A-20	B1-U0-G1	B1-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G0
T395LED-A-30	B2-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G0
T395LED-A-40	B2-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B2-U0-G1
T395LED-A-58	B3-U0-G3	B2-U0-G2	B1-U0-G2	B1-U0-G2	B3-U0-G1
T395LED-A-83	B3-U0-G3	B2-U0-G2	B1-U0-G2	B2-U0-G2	B3-U0-G1
T395LED-A-119	B3-U0-G3	B2-U0-G3	B2-U0-G2	B2-U0-G2	B3-U0-G2

