




Fixture Type: _____
Client: _____
Project: _____
Location: _____
Catalog#: _____



DIMENSIONS

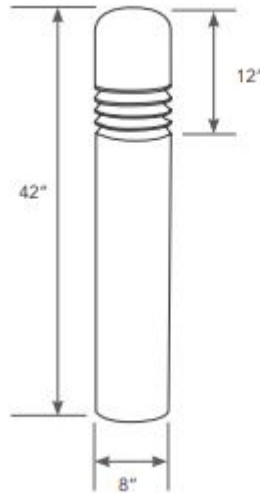

PL-107

PRODUCT INFORMATION

Housing:

Extruded aluminum housing with spun aluminum louvers.

Mounting:

Using 3/8" L-hooks poured in place using template provided.

Wattage:

Array: 15W - 3000K, 4000K, 5000K

Driver:

Electronic Driver, 120V-277V, 50/60Hz

Listing & Rating:

CSA: Listed for wet locations
IP65

ORDERING INFORMATION

Ordering Example: 6917 - 15 - U - 3000K - C - H

Model	Wattage	Ballast	CCT	Lens	Louver Type
Bollard 69 (6917)	15 - 15W	U - 120-277V	3K - 3000K 4K - 4000K 5K - 5000K	C - Clear Lens F - Frosted Lens	H - Horizontal



Fixture Type: _____
 Client: _____
 Project: _____
 Location: _____
 Catalog#: _____



CIRMOUNT



3EBL120277

Catalog#	Description
CIRMOUNT	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
3EBL120277	Provides 90 Minutes of Backup Power

