




Fixture Type: _____
 Client: _____
 Project: _____
 Location: _____
 Catalog#: _____



PL-106

DIMENSION

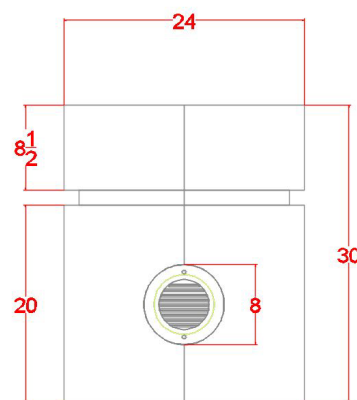

PRODUCT INFORMATION

Purpose:

This bollard is meant to act as a blockade in areas where vehicles are not permitted. Designed to withstand vehicle impact and impede further travel, therefore protecting human lives

Housing:

Eco-Friendly pre-cast hollow concrete (20% recycled) reinforced with rebar measuring at

30 inches in height. Available in different color finishes and different textured finishes.

Mounting:

Mounts over 5 in. diameter steel tube with 1/4 in. thickness

LED:

Array Lumens: 1,414, 2,995
 CRI: 83
 CCT: 3000K, 4000K, 5000K
 Rated Life: 50,000 Hours
 5-Year Warranty
 Aluminum Boards

Wattage:

Array: 15W
 30W

Driver:

Electronic Driver, 120V-277V, 50/60Hz; Dimmable Driver

Listing & Rating:

CSA: Listed for wet locations
 IP65

Options:

Battery Backup.
 Recycled glass and concrete pre-mix, eco-friendly.


Ordering Example:
 6913-15-U-3K-C-P-L-BB

ORDERING INFORMATION

Model	Wattage	Ballast	CCT	Lens	Concrete Color	Sandblast Finish	Options
Tocón 69 (6913)	15 - 15W 30 - 30W 50 - 50W	U - 120-277V	3K - 3000K 4K - 4000K 5K - 5000K	C - Clear Lens F - Frosted Lens	P - Pottery B - Black N - Natural W - White WB - Warm Beige DG - Dusty Green GB - Golden Buff AB - Amber Beige	L - Light Texture M - Medium Texture R - Rough Texture	BB - Battery Backup



Fixture Type: _____
 Client: _____
 Project: _____
 Location: _____
 Catalog#: _____



CIRMOUNT



3EBL120277

Catalog#	Description
CIRMOUNT	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
3EBL120277	Provides 90 Minutes of Backup Power

